


PNEUMATICALLY ACTUATED JACKETED GATE VALVE

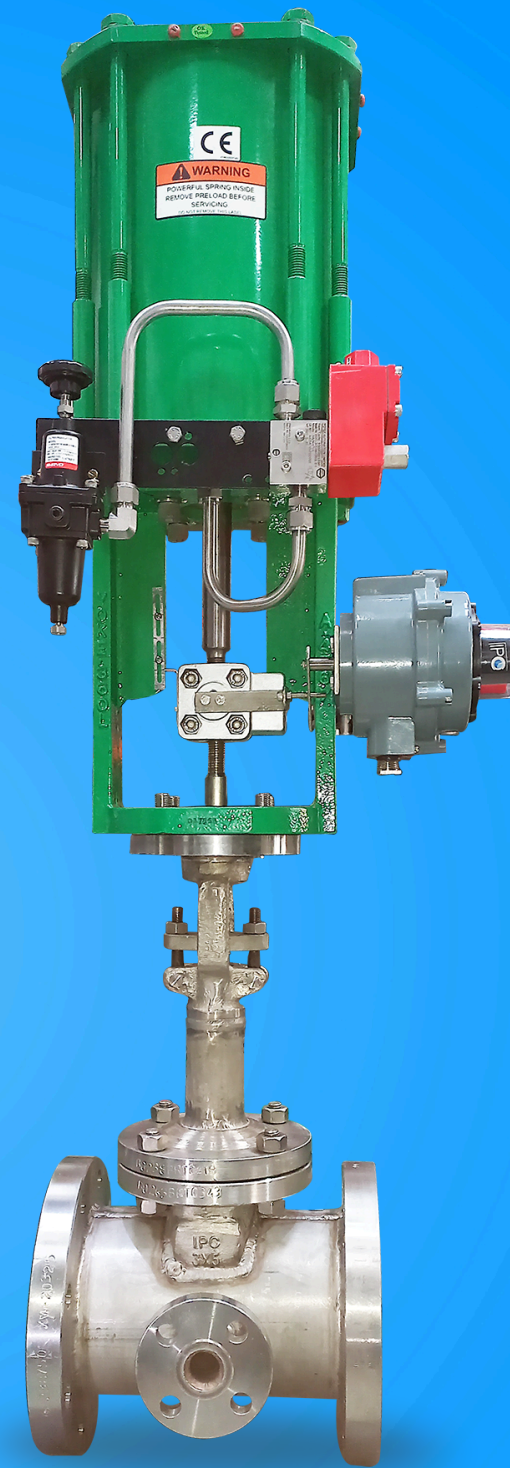

FULL JACKETED GATE VALVE

IPC Make Flameproof
Limit Switch Box with
Position Indicator

SIZE
80 MM

MEDIA
**THERMIC
FLUID**

PRESSURE RATING
#300

TESTING STD.
API 598

VALVE MAKE & TYPE IPC GATE VALVE	CONSTRUCTION OS & Y, BOLTED BONNET	DESIGN STD ISO 10434	FACE TO FACE ASME B 16.10
END CONNECTION FERF ASME B 16.5	JACKET END CONNECTION FLANGED END 25NB	OPERATING TEMP MAX 455° C & MIN -29° C	STEM EXTENSION 100 MM
LEAKAGE CLASS API 598	FLOW DIRECTION BI-DIRECTIONAL	STEM MOC ASTM A276 TP 316L	BODY MOC ASTM A 351 Gr. CF3M
WEDGE MOC ASTM A 351 GR. CF3M + ST-6 FACING	SEAT MOC ASTM A182 GR F316L + ST-6 FACING	OPERATION SINGLE ACTING PNEUMATIC CYLINDER ACTUATOR	AIR FAIL POSITION OPEN