


# PNEUMATIC DOUBLE ACTING ACTUATED GATE VALVE WITH AIR TANK

IPC Make Flameproof Limit  
Switch Box with Position  
Indicator and pilot valve.

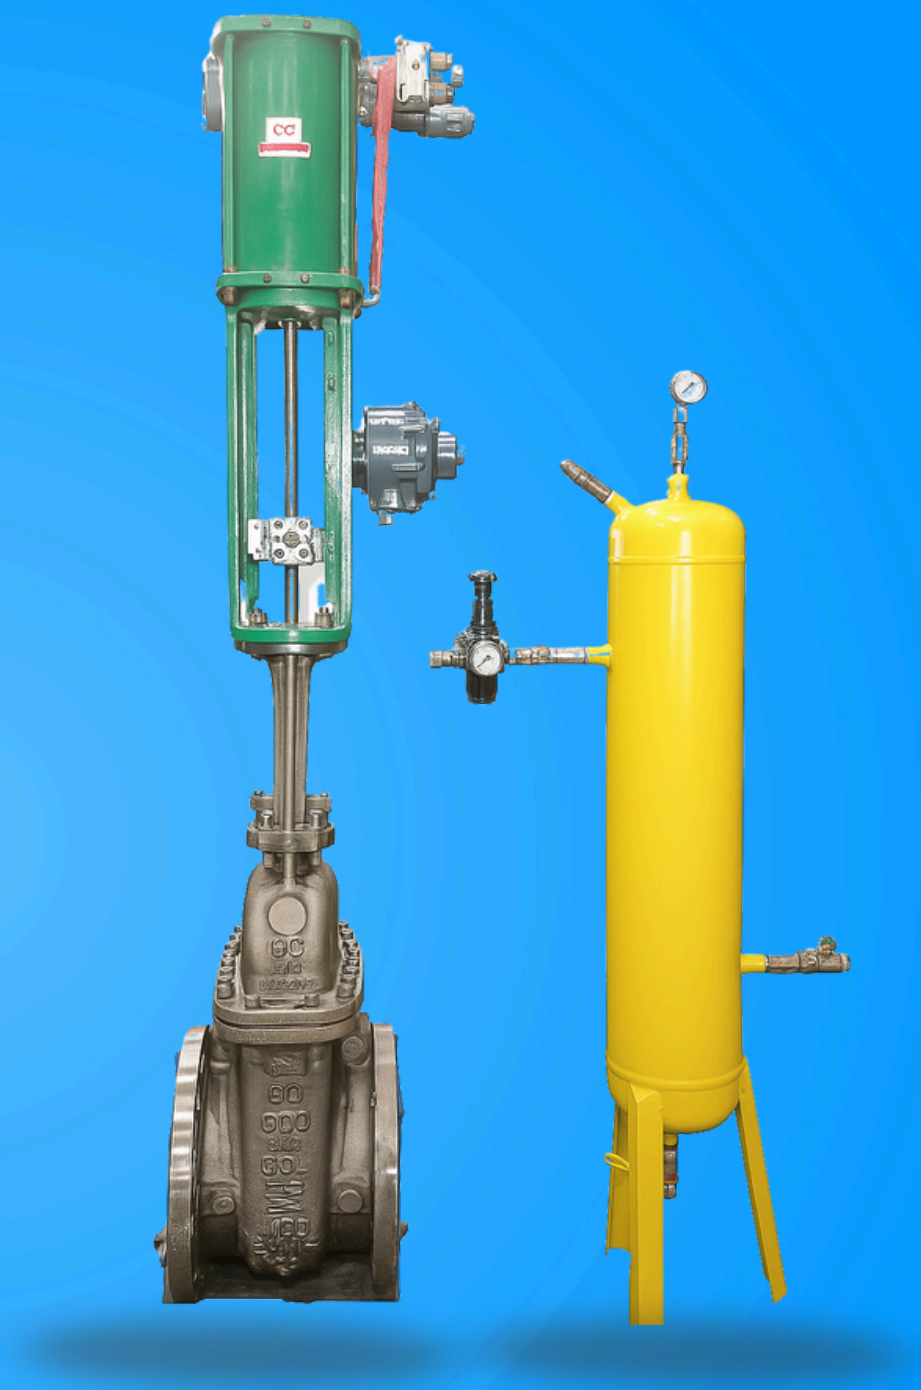

SIZE <b>10"</b> <b>(250 MM)</b>	SERIES <b>701</b>	PRESSURE RATING <b>CLASS</b> <b>150</b>	TESTING STD. <b>API 598</b>
---------------------------------------	----------------------	---	--------------------------------

VALVE MAKE & TYPE <b>IPC</b> <b>GATE VALVE</b>	CONSTRUCTION <b>BOLTED BONNET</b>	DESIGN STD <b>ISO 10434</b>	FACE TO FACE <b>ASME B 16.10</b>
END CONNECTION <b>ASME B 16.5, FERF</b>	OPERATION <b>PNEUMATIC</b> <b>DOUBLE ACTING</b> <b>ACTUATOR WITH</b> <b>AIR TANK</b>	FUNCTION (DUTY) <b>ON-OFF</b>	TRIM <b>SS316L</b>
LEAKAGE CLASS <b>API 598</b>	FLOW DIRECTION <b>BI-DIRECTIONAL</b>	DISC/WEDGE MOC <b>ASTM A351 Gr.</b> <b>CF3M</b>	BODY MOC <b>ASTM A 351 Gr.</b> <b>CF3M</b>
AIR SUPPLY <b>4 Bar g</b>	SEAT MOC <b>A182 GR. F316L</b>	STEM MOC <b>ASTM A276 TP 316L</b>	AIR FAIL POSITION <b>FAIL CLOSE</b> <b>(WITH AIR TANK</b> <b>AIR)</b>