


ON-OFF
PNEUMATIC
ACTUATED
PISTON
VALVES

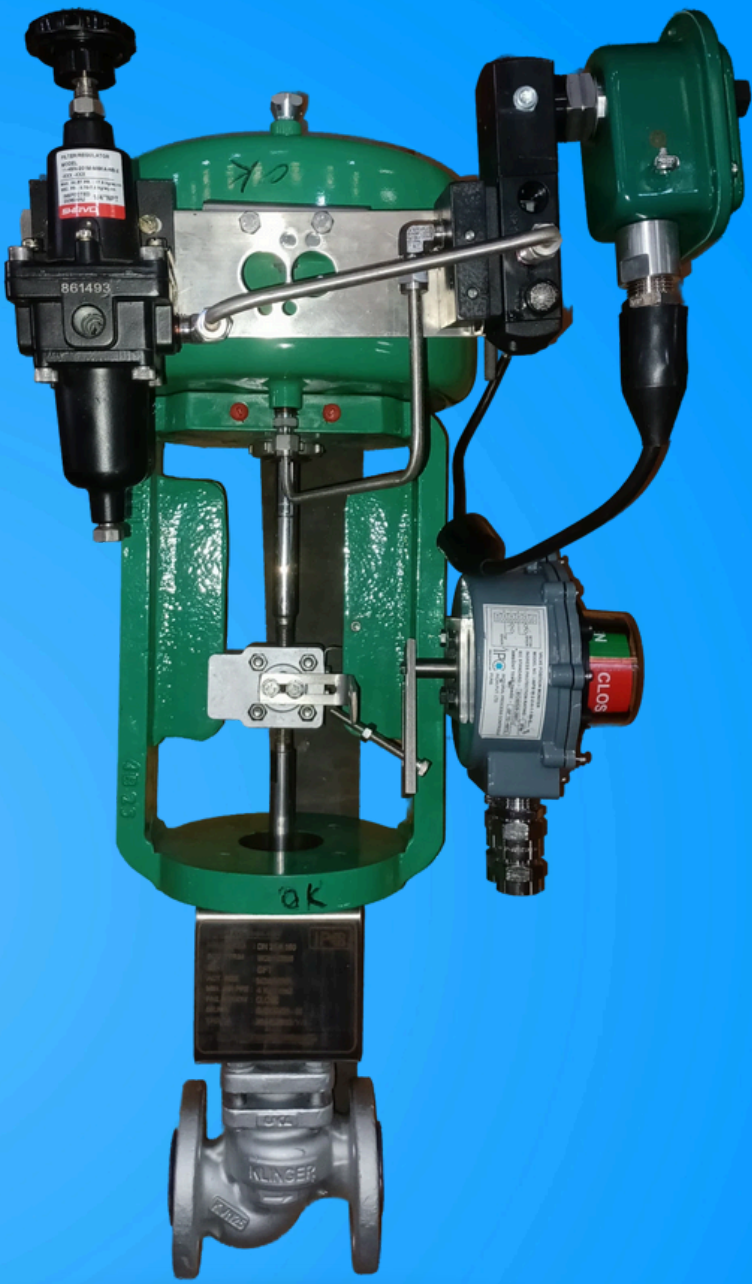

SIZE 1.5" (40NB)	CONSTRUCTION BOLTED BONNET	PRESSURE RATING #150	TESTING STD. API 598
--------------------------------------	--	--------------------------------	--------------------------------

VALVE TYPE PISTON VALVE	VALVE PAINT STANDARD	DESIGN STD ASME B16.34	FACE TO FACE ASME B16.10
END CONNECTION ASME B 16.5, FERF	OPERATION DIAPHRAM TYPE PNEUMATIC SPRING RETURN ACTUATOR WITH REVERSE ACTING	END CONNECTION STD ASME B16.5 FERF	SOLENOID VALVE 3/2 WAY INTRINSIC SAFE & WEATHER PROOF IP 67
VALVE BODY MOC ASTM A216 GR. WCB	VALVE PISTON MOC SS316	VALVE SEAT MOC CFT	LIMIT SWITCH BOX Two P & F Sensors Weather proof IP67
AIR SUPPLY 4 Kg/cm2	FUNCTION (DUTY) ON-OFF	AIR FAIL POSITION FAIL CLOSE	FLOW DIRECTION UNI- DIRECTIONAL